


ST-4 Surface/Suspended Mounted LED Wrap/Linear Light

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

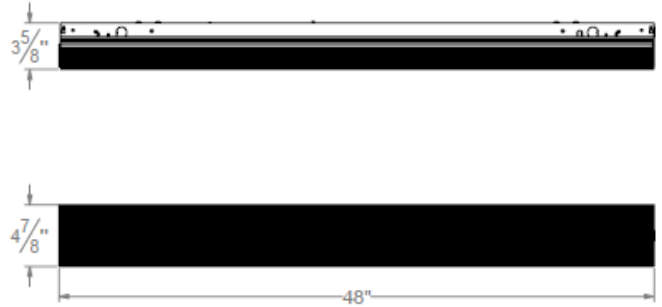

LINEAR LIGHT

Features

ST-4 is a high lumen, thin, beautiful appearance, safe and reliable, convenient installation and easy maintenance linear light, is an industrial grade luminaire which is ideal for retail, commercial and industrial applications.

Using imported high transmittance pc cover, retain color for long time.

Available in 1x4 and 1x8 models.

Emergency system is available.

Standard finish is powder coat textured white. Optional silver, black or custom color paint finishes.

Standard dimming control: 0 ~ 10 v dimming.

Labels: ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2, Damp location.

Application: suit for the garage, warehouse, basement and car parks and other places to provide general illumination.

Warranty: 5-year limited warranty on LED and Driver.

Construction

Die formed, 22 gauge, cold rolled steel designed for high strength. End caps snap in for easy installation and maintenance.

In addition, the end cap can be used as a joint aligner for continuous row mounting.

Light Source

Using the energy-saving highlighting 2835 SMD LED light source.

Distributed LED array in a variety of lumen output packages.

LED color is available in 2700-6500K. Module is replaceable.



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: November. 2017

Mounting

Luminaires may be surface mounted or suspended, individually or in continuous row. Fixtures easily snap together for long continuous rows.

Driver

Using isolation constant-current drive power, is the guarantee of security, stability and no flicking.

Specification

Power	40W
Voltage	120V ~ 277V AC
Beam Angle	180 °
Frequency	50/60Hz
Power factor	>0.98
CRI	80+/90+
Dimmable	NONE/0-10V
CCT	2700-6500K
Lifespan	50000 H
Certification	ETL listed

Packing

Inner box: 140*80*1225mm 1 pcs/Box Outer box: 124*29.5*18.5CM 4PCS/CTN

Ordering Guide

Series	Length/Wattage/Lumen	Mounting	Dimming
<input type="checkbox"/> ST-4/ST-8	<input type="checkbox"/> 4FT/40W/3500LM	<input type="checkbox"/> Surface Mounted	<input type="checkbox"/> NONE
<input type="checkbox"/> LED Linear/Wrap Light	<input type="checkbox"/> 8FT/80W/7000LM	<input type="checkbox"/> Suspended Mounted	<input type="checkbox"/> 0-10V Dimming
Finish	Functions		
<input type="checkbox"/> White	<input type="checkbox"/> Emergency Backup(Brightness of 50%, the emergency time of 60 minutes, at 25%, the emergency time of 90 minutes)		
<input type="checkbox"/> Silver	<input type="checkbox"/> RGBW		
<input type="checkbox"/> Black	<input type="checkbox"/> Tunable(3000K, 4000K, 5000K, choose any 2 of them)		
	<input type="checkbox"/> motion sensor(Sensing distance is 10 meters)		



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: November. 2017



Notes:

1. To ensure normal working of the product, please make sure that the voltage using is within the indicated voltage range.
2. Please follow the correct method to install and use this product.
3. Disconnect the power supply when installing and removing the product to avoid the risk of electric shock.
4. Do not look at the LED light source for a long time; high-intensity light source may cause eye damage.
5. When you find the following questions, please consult with a qualified electrician for repair service.

Do not disassemble yourself:

- A. When the product produces stench gas, abnormal sound, or unusual flicker.
 - B. When the shell is damaged, the foreign body intrudes inside.
6. The parameters in this specification may be modifying according to product update.



LINEAR LIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: November. 2017