


DGL-4WT81

Surface/Suspended Mounted T8 Linear Light Series

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

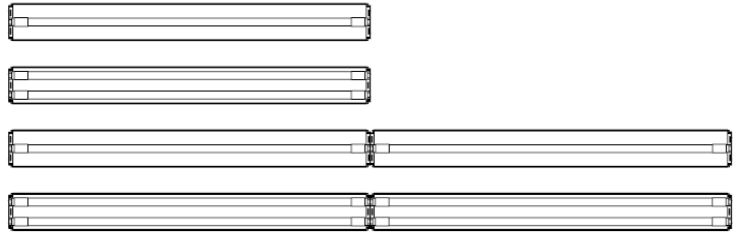

Features

The product is a single tube or double tube T8 LED tube, providing high lumen, thin, elegant in appearance, safe and reliable, easy to install and maintenance linear Light.

This series product is an industrial grade luminaries which is ideal for retail, commercial and industrial applications. Standard finish is powder coat textured white. Optional silver, black or custom color paint finishes.

Emergency system is available.

Available in 1x4 and 1x8 models

IP Grade: IP44

Labels: ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2, Damp location.

Construction

Die formed, 22 gauge, cold rolled steel designed for high strength.

End caps snap in for easy installation and maintenance.

In addition, the end cap can be used as a joint aligner for continuous row mounting.

Mounting

Luminaires can be surface mounted or suspended, individually or in continuous row.

Fixtures easily snap together for long continuous rows.

LINEAR LIGHT



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: November. 2017

Application

Suit for the garage, warehouse, basement and car parks and other places to provide general illumination.

Specification

Power	18W/Tube
Voltage	120V/277V AC
Length	2 Foot/3 Foot/4 Foot/8 Foot
Lumens	2000 Lumens/Tube
Beam Angle	180 °
CRI	80+/90+
Dimmable	Track/NONE/0-10V Dimming
CCT	2700-6500K
Certification	ETL listed

Light Source is not included

Packing

4 Foot Outer box: 13.3*10*124CM 2PCS/CTN

8 Foot Outer box: 13.3*5.3*246CM 1PCS/CTN

Ordering Guide

Series	Length/Wattage/Lumens	Mounting
<input type="checkbox"/> DGL-2WT81	<input type="checkbox"/> 2 Foot Single Tube/9W/810LM	<input type="checkbox"/> Surface Mounted
<input type="checkbox"/> DGL-2WT82	<input type="checkbox"/> 2 Foot Double Tube/18W/1620LM	<input type="checkbox"/> Suspended Mounted
<input type="checkbox"/> DGL-3WT81	<input type="checkbox"/> 3 Foot Single Tube/13W/1170LM	
<input type="checkbox"/> DGL-3WT82	<input type="checkbox"/> 3 Foot Double Tube/26W/2340LM	
<input type="checkbox"/> DGL-4WT81	<input type="checkbox"/> 4 Foot Single Tube/18W/2000LM	
<input type="checkbox"/> DGL-4WT82	<input type="checkbox"/> 4 Foot Double Tube/36W/4000LM	
<input type="checkbox"/> DGL-8WT81	<input type="checkbox"/> 8 Foot Double Tube/36W/4000LM	
<input type="checkbox"/> DGL-8WT82	<input type="checkbox"/> 8 Foot Four Tube/72W/8000/LM	

LED T8 Linear Wrap Light

Dimming	Finish	Functions
<input type="checkbox"/> NONE	<input type="checkbox"/> White	<input type="checkbox"/> Emergency Backup(Brightness of 50%, the emergency time of 60 the emergency time of 90 minutes)
<input type="checkbox"/> 0-10V Dimming	<input type="checkbox"/> Silver	<input type="checkbox"/> RGBW
	<input type="checkbox"/> Black	<input type="checkbox"/> Tunable(3000K, 4000K, 5000K, choose any 2 of them)
		<input type="checkbox"/> motion sensor(Sensing distance is 10 meters)



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: November. 2017



Notes:

1. To ensure normal working of the product, please make sure that the voltage using is within the indicated voltage range.
2. Please follow the correct method to install and use this product.
3. Disconnect the power supply when installing and removing the product to avoid the risk of electric shock.
4. Do not look at the LED light source for a long time; high-intensity light source may cause eye damage.
5. When you find the following questions, please consult with a qualified electrician for repair service.


Do not disassemble yourself:

- A. When the product produces stench gas, abnormal sound, or unusual flicker.
 - B. When the shell is damaged, the foreign body intrudes inside.
6. The parameters in this specification may be modifying according to product update.




Dimensions

DGL-2WT81

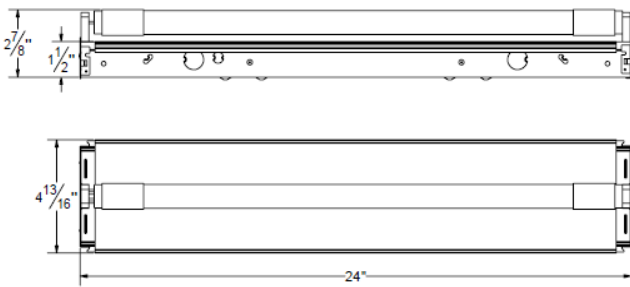


DGL-2WT82

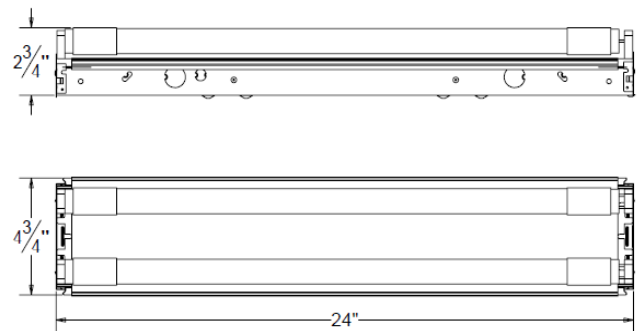


LINEAR LIGHT

DGL-3WT81

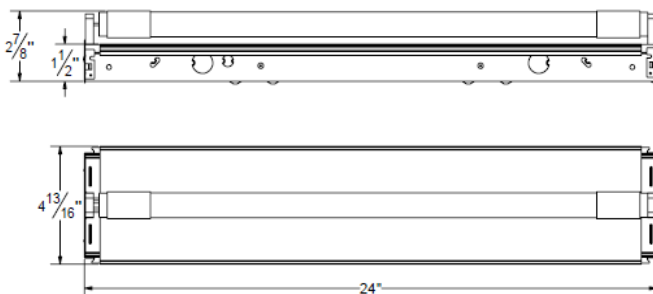

DGL-3WT82

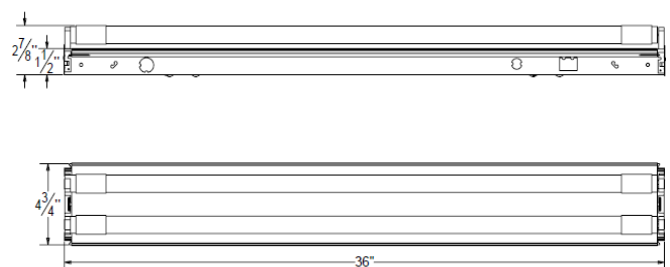

Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685


E-mail: info@liteharbor.com

Website: www.liteharbor.com


Specifications subject to change w/o notice

Revision: November. 2017

DGL-4WT81

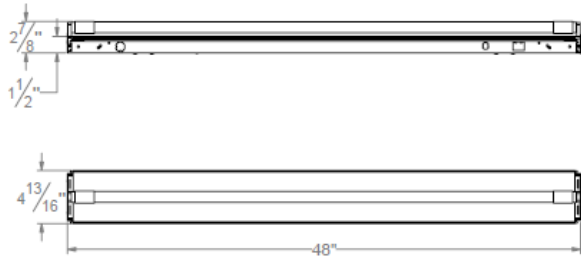


DGL-4WT82

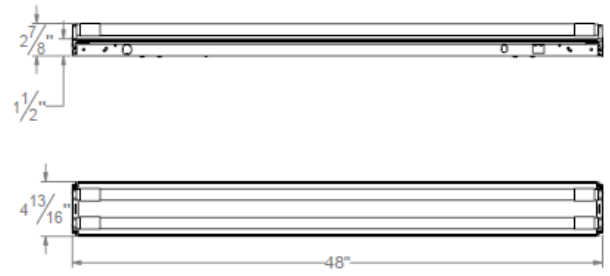

DGL-8WT82



DGL-8WT84

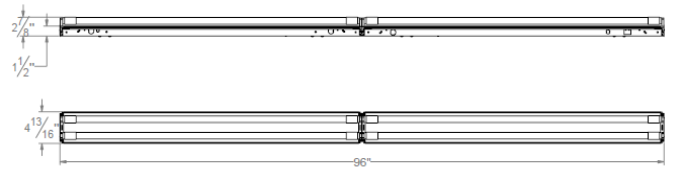

LINEAR LIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: November. 2017