


LED DOWNLIGHT SERIES

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



Trimmed

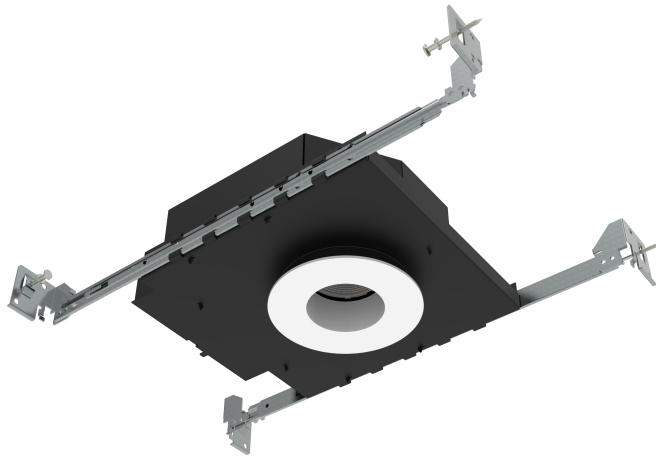

Trimless



LED DOWNLIGHT

Shallow New Construction LED Downlight

Features

- LED Downlights with shallow housings for recessed LED lighting.
- The finished ceiling is 2 or 3" high and can help you easily combine quality lighting with piping, building infrastructure and electrical equipment in any ventilated space anywhere.
- Meet the new thinnest LED housing in the world, measuring less than 3" tall from top to bottom
- 850 to 1150 delivered lumens, 5 classic white color temperatures (2700K, 3000K, 3500K, 4000K, 5000K)
- Isolated constant current drive power supply, safe and stable guarantee without strobe, standard dimming control, matching most dimmers.
- Beam angle: 12/24/36°
- Available in trimmed or trimless.

Ceiling Thickness

- Accommodates ceiling thickness 1/2"
- Delivered lumens are maintained through entire range



Liteharbor Lighting Technology Co., Ltd.
 New Industry Area Hecun Danzao Town
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687
 FAX: +86-757-8180 8685
 E-mail: info@liteharbor.com

Website: www.liteharbor.com
 Specifications subject to change w/o notice
 Revision: Aug. 2019

Listing / Warranty

- ETL listed to US and Canadian standards for damp location W/Feed through.
- 5 Year Limited Warranty.

Applications

- Apply to automotive and parking, education, government, healthcare, hospitality, offices and banks, religious, retail.

Parameter

Input Voltage	AC 120V/277V		
Power	12W	15W	20W
Dimming	Non-dimming/TRIAC/0~10V Dimming		
CCT	2700K, 3000K, 3500K, 4000K, 5000K		
CRI	80/90CRI		

Ordering Guide

Series/Trim	Watt	Voltage	CCT	CRI
<input type="checkbox"/> A3-M-2/Trimmed	<input type="checkbox"/> 12W	<input type="checkbox"/> AC 120V	<input type="checkbox"/> 2700K	<input type="checkbox"/> 80+
<input type="checkbox"/> A3-M-2-TL/Trimless	<input type="checkbox"/> 15W	<input type="checkbox"/> AC 277V	<input type="checkbox"/> 3000K	<input type="checkbox"/> 90+
LED Downlight Seires	<input type="checkbox"/> 20W		<input type="checkbox"/> 3500K	
			<input type="checkbox"/> 4000K	
			<input type="checkbox"/> 5000K	

Dimming

- Non-dimming
- TRIAC Dimming
- 0~10V Dimming

*Other Special Requirements Please Contact with Our Factory



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China


TEL: +86-757-8180 8687
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Aug. 2019




Dimensions


Round Trimmed

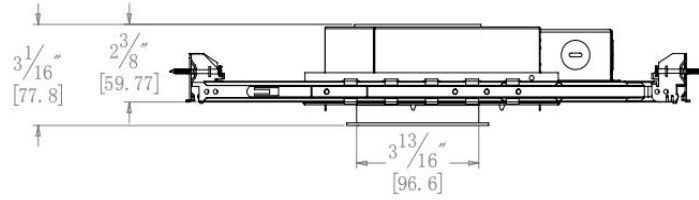


Cut-out Size: 4"

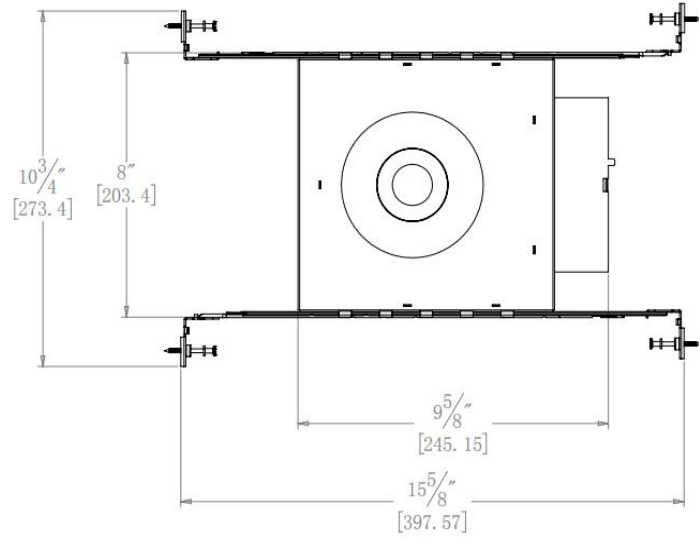

Round Trimless

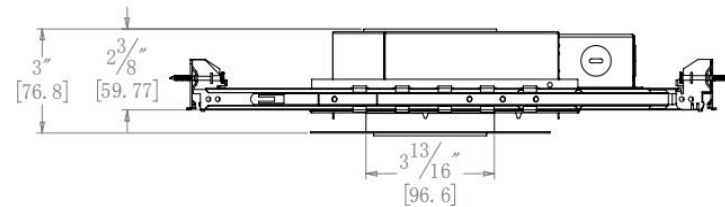

Cut-out Size: 4"

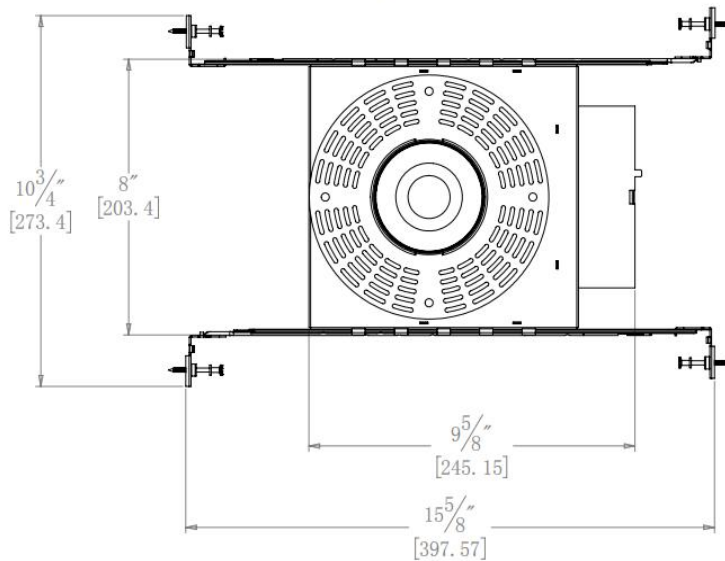

LED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Aug. 2019