

MINI LED MULTIPLE DOWNLIGHT

Liteharbor Mini LED Multiple Downlight provide a modern and aesthetically pleasing alternative to track or standard recessed installations. Available in a variety of light configurations, with both new construction and remodel options for installation. Whether in terms of design or usability, it is indeed one of the most versatile embedded products in the commercial lighting industry.




Anti-glare Linear Mini Multiple Lighting, Increase Your Visual Enjoyment

Commercial Mini Multiples

Liteharbor Mini Multiple Downlight Series is equipped with 1, 2, 5, 10, 15, 2x5, 2x10 and 2x15 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visual comfort make it affordable to any commercial applications.

Standard Configurations

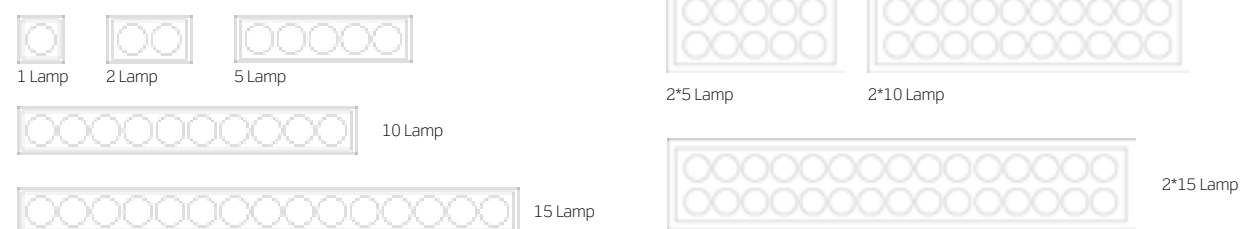

Why we choose mini LED multiple downlight?

- Modern and aesthetically pleasing alternative
- Economical reasonable lowest price
- Mini size to save place and reduce cost
- Vertical/Adjustable/Wall wash, three different beam angles for choose
- Available in 1, 2, 5, 10, 15, 2x5, 2x10 and 2x15 configurations
- Available in trim or trimless, providing more options for you

All Liteharbor Multiples are offered with 3-Year limited warranty. A robust sleek design, state-of-the-art engineering and a rigorous testing regimen are all factors that make our products so reliable. All the recessed multiples are cETLus listed. They can be well sold in North America market.



Lamp Body

High quality aluminum radiator

Light Source

High-efficiency lamp beads, a variety of color temperatures, high color rendering index

Reflector

Anti-glare

Concentrating Optical Reflector

Precise light distribution

Adjustable Fixing Frame

Fixed the lamp body




Cover And Reflector Color Options

* Multiple colors are optional and customized is available




Three Different Types of Lighting

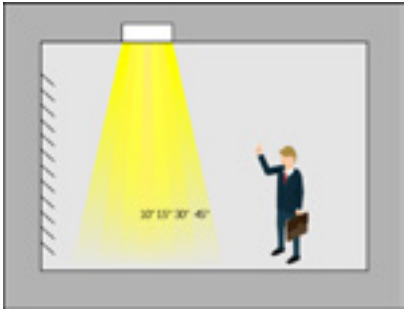


Vertical Lighting

Architectural wonders and interesting spaces are highlighted and appreciated through the use of indoor vertical lighting. Vertical lighting emphasizes the limitations of space, making the area appear more spacious and open. Indoor vertical lighting increases our three-dimensional perception and gives environments depth.

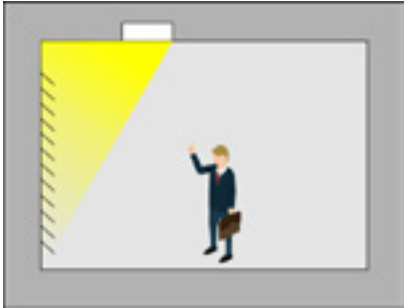

Wall Wash Lighting


For uniform vertical illuminance the distance a of the luminaire from the wall should be around one third of the room height. Optimal wall offset and luminaire spacing values are indicated in the wall washer tables on the product data sheets.

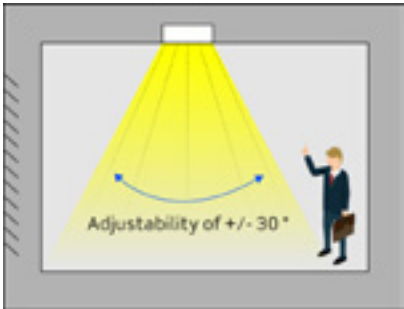

Adjustable Lighting


You can freely adjustable the irradiation angle according to the actual needs. It's a way of adding style and drama to your home or help you see when you're doing projects in which you need a finer light, this will help you illuminate the pieces you want on display. It will help you see more details and creating higher quality results.

Installation Options

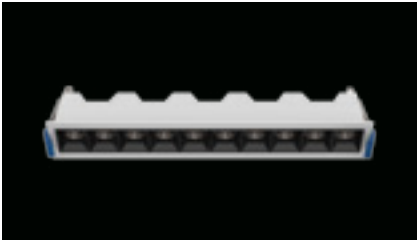

Remodel Installation

This is a simple and quick installation, push the spring retaining clips up and insert the lamp into the cut hole. Release the clips to finish the installation. It can be installed from below the ceiling in home remodel applications, ideal for those who have limited or no access to the ceiling.

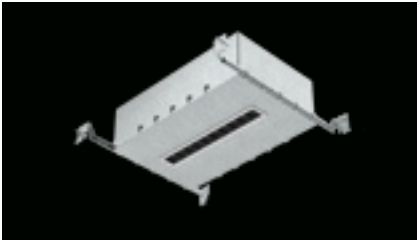

New Construction with Housing



The New construction with housing is designed to be installed in the ceiling surrounded by insulation. And it is equipped with thermally protected. The housing won't overheat and cause a fire in the roof or overhead joist space. Airtight design keeps air conditioning or heating from leaking out of the home through the housing. Housing and Trim can be shipped separately.



New Construction with Mounting Plate

Plaster frame with hanger bar system to be installed during rough-in phase. To install a new construction lighting fixture you'll need to screw or nail the fixture's frame to the ceiling joists. For new construction ceiling assemblies, like Sheetrock, acoustic tiles, or paneling. Plaster frame and trim can be shipped separately.


Color Rendering Index(CRI)

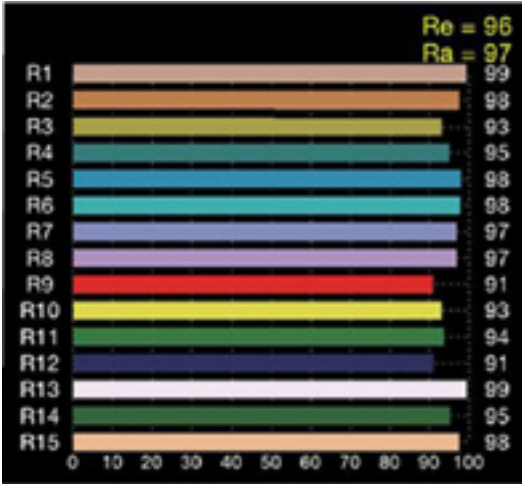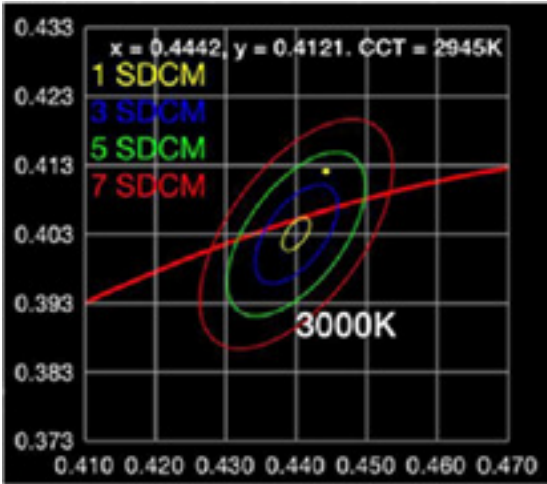

Color Rendering options comparison, 3000K

Liteharbor High Performance COB LED Track Lights Series is available in two CRI options, 80+ or 90+. The 90+ CRI option is only available in 2700K and 3000K. 90+ CRI delivers a premium high color rendering LED light source.

LIGHT DISTRIBUTION CURVE

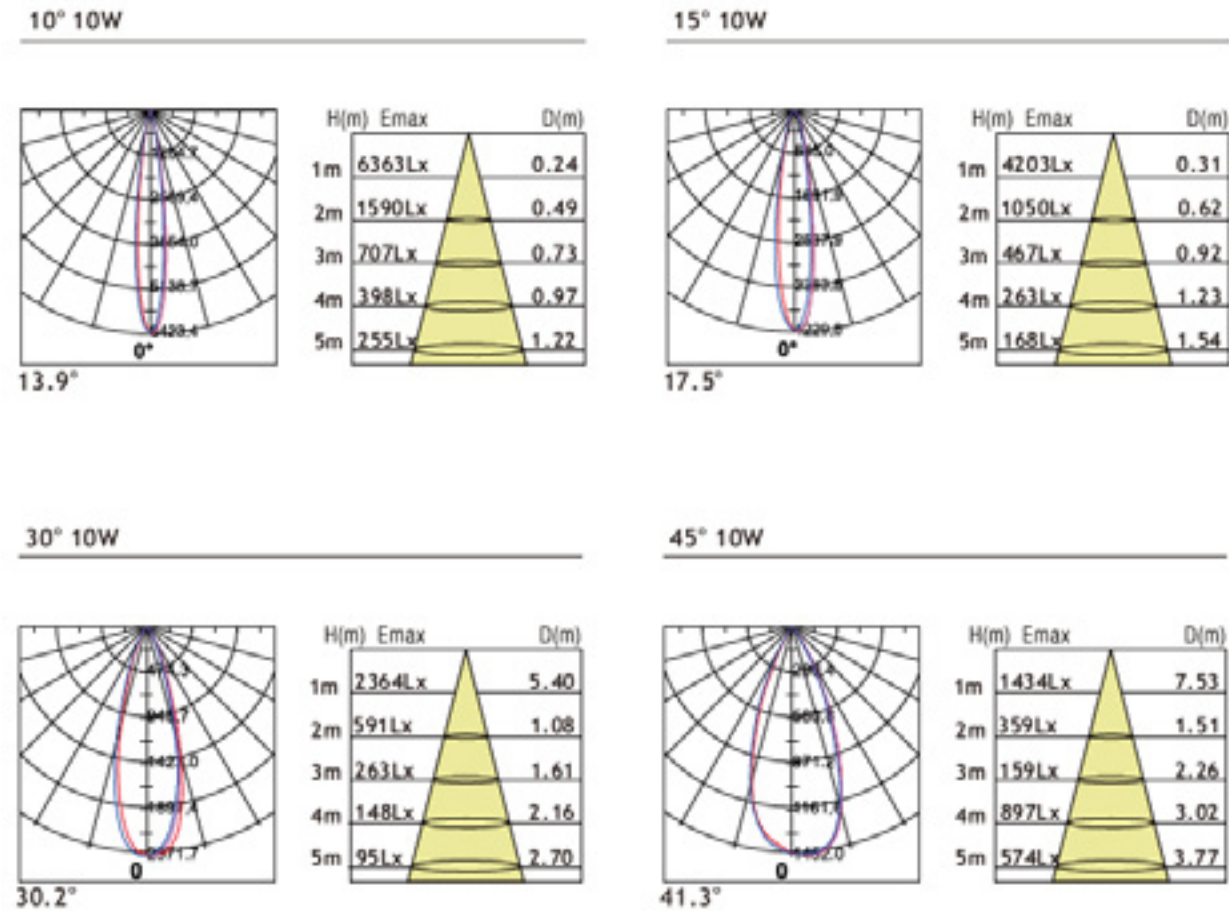

REMODEL VERTICAL MINI LED MULTIPLE DOWNLIGHT WITH 5 LAMPS

G401XA-X Series



DESCRIPTION
The Mini Multiple Downlight Series is equipped with 1, 2, 5, 10 and 15 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visual comfort.

FEATURES
Revolutionary narrow recessed downlight available in slim trim or trimless. The simplified retrofit installation can be used in both new and existing spaces. Dimmable with a variety of commonly used drivers. Life Rated for 50,000 hours at 70% lumen maintenance. Easy installation for new construction and remodel applications.

SPECIFICATION
Optics: Low luminance: Spot optic, with pptibeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.

APPLICATIONS
Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.



DIMENSIONS

1x1 LAMP Cut-Out: 1 3/8" x 1 3/8"
1x2 LAMP Cut-Out: 1 3/8" x 2 1/2"
1x5 LAMP Cut-Out: 1 1/2" x 5 1/2"
1x10 LAMP Cut-Out: 1 1/2" x 10 3/4"
1x15 LAMP Cut-Out: 1 1/2" x 16"

TRIM OPTION

Trimmed Trimless

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
○ G4011A-01/150lm	○ 120V	○ 3000K	○ 80+	○ Non-dimming	○ Trimmed	○ White	○ White
○ G4011A-02/310lm	○ 230V	○ 4000K	○ 90+	○ TRIAC Dimming	○ Trimless	○ Black	○ Black
○ G4011A-05/720lm	○ 277V	○ 5000K		○ 0~10V Dimming		○ Silver	○ Chrome
○ G4012A-10/1450lm	○ 120-277V						○ Gold
○ G4013A-15/2200lm							

* Other special requirements please confirm with our factory

LISTING / WARRANTY
ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



Liteharbor Harbor of Light!

IC AIRTIGHT NEW CONSTRUCTION VERTICAL MINI LED MULTIPLE DOWNLIGHT

G401XA-X-IA Series



DESCRIPTION
The IC Airtight New Construction Mini Multiple Downlight Series is equipped with 1, 2, 5, 10 and 15 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visua comfort.

FEATURES
Revolutionary narrow recessed downlight available in slim trim or trimless. The simplified retrofit installation can be used in both new and existing spaces. Dimmable with a variety of commonly used drivers. Life Rated for 50,000 hours at 70% lumen maintenance. Easy installation for new construction and remodel applications.

SPECIFICATION
Optics: Low luminance: Spot optic, with pptibeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
MINI MULTIPLE DOWNLIGHT
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.

APPLICATIONS
Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.



DIMENSIONS

1x1 LAMP
L: 9 13/16"xW: 9 13/16"xH: 4 7/16"
Cut-Out: 1 3/8" x 1 3/8"

1x2 LAMP
L: 9 13/16"xW: 9 13/16"xH: 4 7/16"
Cut-Out: 1 3/8" x 2 1/2"

1x5 LAMP
L: 9 13/16"xW: 9 13/16"xH: 4 1/2"
Cut-Out: 1 1/2" x 5 1/2"

3x5 LAMP
L: 20 5/8"xW: 9 13/16"xH: 4 7/16"
Cut-Out: 1 1/2" x 16"

2x5 LAMP
L: 15 5/16"xW: 9 13/16"xH: 4 7/16"
Cut-Out: 1 1/2" x 10 3/4"

TRIM OPTION

Trimmed Trimless

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
○ G4011A-01-IA/150lm	○ 120V	○ 3000K	○ 80+	○ Non-dimming	○ Trimmed	○ White	○ White
○ G4011A-02-IA/310lm	○ 230V	○ 4000K	○ 90+	○ TRIAC Dimming	○ Trimless	○ Black	○ Black
○ G4011A-05-IA/720lm	○ 277V	○ 5000K		○ 0~10V Dimming		○ Silver	○ Chrome
○ G4012A-10-IA/1450lm	○ 120-277V						○ Gold
○ G4013A-15-IA/2200lm							

* Other special requirements please confirm with our factory

LISTING / WARRANTY
ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



NEW CONSTRUCTION VERTICAL MINI LED MULTIPLE DOWNLIGHT

LIGHT SOURCE SMD CHIPS G401XA-X-NC Series



DESCRIPTION
The New Construction Mini Multiple Downlight are equipped with1, 2, 5, 10 and 15 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visua comfort.


FEATURES
Revolutionary narrow recessed downlight available in slim trim or trimless. The simplified retrofit installation can be used in both new and existing spaces. Dimmable with a variety of commonly used drivers. Life Rated for 50,000 hours at 70% lumen maintenance. Easy installation for new construction and remodel applications.

SPECIFICATION
Optics: Low luminance: Spot optic, with pptibeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.


APPLICATIONS
Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.



DIMENSIONS

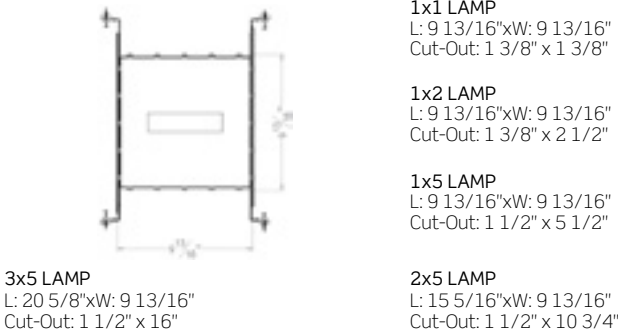

TRIM OPTION

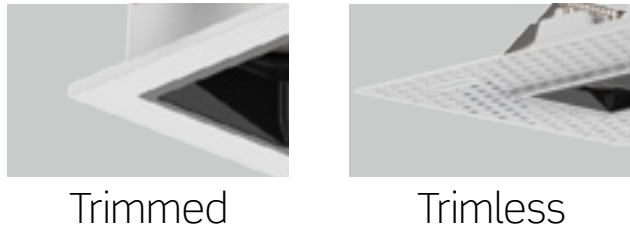

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
○ G4011A-01-NC/150lm	○ 120V	○ 3000K	○ 80+	○ Non-dimming	○ Trimmed	○ White	○ White
○ G4011A-02-NC/310lm	○ 230V	○ 4000K	○ 90+	○ TRIAC Dimming	○ Trimless	○ Black	○ Black
○ G4011A-05-NC/720lm	○ 277V	○ 5000K		○ 0~10V Dimming		○ Silver	○ Chrome
○ G4012A-10-NC/1450lm	○ 120-277V						○ Gold
○ G4013A-15-NC/2200lm							

* Other special requirements please confirm with our factory

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.



Liteharbor Harbor of Light!

REMODEL ADJUSTABLE MINI LED MULTIPLE DOWNLIGHT

LIGHT SOURCE SMD CHIPS G401XA-X-A Series



DESCRIPTION
The Mini Multiple Downlight Series is equipped with5, 10 and 15, 5x2, 10x2, 15x2 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visual comfort. Recessed rectangular luminaire with LEDs. Shaped steel sheet structural compartment with outer rim. The 15 lighting cells linear body, in die-cast aluminium, can be used to direct the emission with a tilting adjustability of +/- 30 °.


FEATURES
The simplified retrofit installation can be used in both new and existing spaces.

SPECIFICATION
Optics: Low luminance: Spot optic, with pptibeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.

APPLICATIONS
Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.



DIMENSIONS

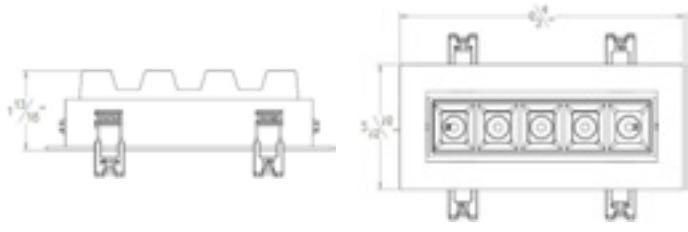

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
○ G4011A-05-A/720lm	○ 120V	○ 3000K	○ 80+	○ Non-dimming	○ Trimmed	○ White	○ White
○ G4011A-2x05-A/1450lm	○ 230V	○ 4000K	○ 90+	○ TRIAC Dimming	○ Trimless	○ Black	○ Black
○ G4012A-10-A/1450lm	○ 277V	○ 5000K		○ 0~10V Dimming		○ Silver	○ Chrome
○ G4012A-2x10-A/2900lm	○ 120-277V						○ Gold
○ G4013A-15-A/2200lm							
○ G4013A-2x15-A/4400lm							

* Other special requirements please confirm with our factory

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.



IC AIRTIGHT NEW CONSTRUCTION ADJUSTABLE MINI LED MULTIPLE DOWNLIGHT



LIGHT SOURCE
SMD CHIPS

G401XA-X-A-IA Series








30°
Optics



DIMMING



80/90
LED CRI



120V
277V
Input Voltage




2
W
Power



60~80
lm/W
Lumens Efficiency

DIMENSIONS

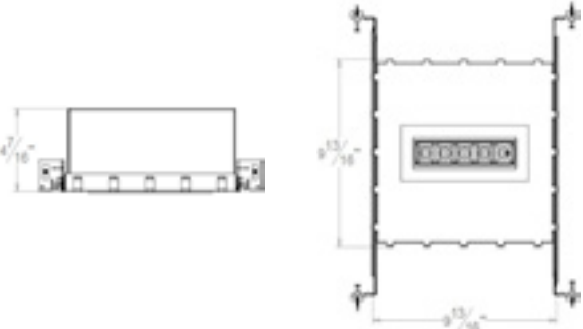

DESCRIPTION

The Mini Multiple Downlight Series is equipped with5, 10 and 15, 5x2, 10x2, 15x2 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visual comfort. Recessed rectangular luminaire with LEDs. Shaped steel sheet structural compartment with outer rim. The N*5 lighting cells linear body, in die-cast aluminium, can be used to direct the emission with a tilting adjustability of +/- 30 °.

FEATURES

The simplified retrofit installation can be used in both new and existing spaces.
Dimmable with a variety of commonly used drivers.
Life Rated for 50,000 hours at 70% lumen maintenance.
Easy installation for new construction and remodel applications.

SPECIFICATION

Optics: Low luminance: Spot optic, with pptibeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.

APPLICATIONS

Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.

1x5 LAMP
L: 9 13/16"xW: 9 13/16"xH: 4 7/16"
Cut-Out: 2 1/4" x 6 1/16"

1x10 LAMP
L: 15 5/16"xW: 9 13/16"xH: 4 7/16"
Cut-Out: 2 1/4" x 11 5/16"

1x15 LAMP
L: 20 5/8"xW: 9 13/16"xH: 4 7/16"
Cut-Out: 2 1/4" x 16 1/2"

ORDERING GUIDE / YOUR PRODUCT CODE



SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
<input type="radio"/> G4011A-01-IA/150lm	<input type="radio"/> 120V	<input type="radio"/> 3000K	<input type="radio"/> 80+	<input type="radio"/> Non-dimming	<input type="radio"/> Trimmed	<input type="radio"/> White	<input type="radio"/> White
<input type="radio"/> G4011A-02-IA/310lm	<input type="radio"/> 230V	<input type="radio"/> 4000K	<input type="radio"/> 90+	<input type="radio"/> TRIAC Dimming	<input type="radio"/> Trimless	<input type="radio"/> Black	<input type="radio"/> Black
<input type="radio"/> G4011A-05-A-IA/720lm	<input type="radio"/> 277V	<input type="radio"/> 5000K		<input type="radio"/> 0~10V Dimming		<input type="radio"/> Silver	<input type="radio"/> Chrome
<input type="radio"/> G4012A-10-A-IA/1450lm	<input type="radio"/> 120-277V						<input type="radio"/> Gold
<input type="radio"/> G4013A-15-A-IA/2200lm							

* Other special requirements please confirm with our factory

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



Liteharbor Harbor of Light!





NEW CONSTRUCTION ADJUSTABLE MINI LED MULTIPLE DOWNLIGHT




LIGHT SOURCE
SMD CHIPS

G401XA-X-A-NC Series



DIMENSIONS

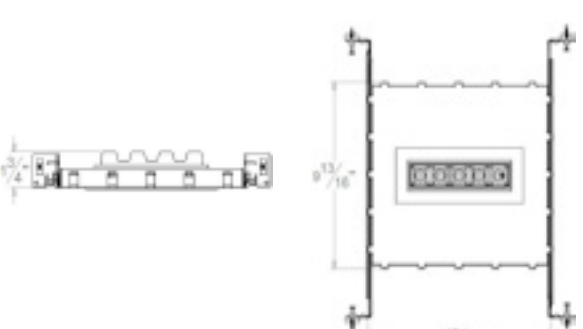

DESCRIPTION

The Mini Multiple Downlight Series is equipped with5, 10 and 15, 5x2, 10x2, 15x2 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visual comfort. Recessed rectangular luminaire with LEDs. Shaped steel sheet structural compartment with outer rim. The N*5 lighting cells linear body, in die-cast aluminium, can be used to direct the emission with a tilting adjustability of +/- 30 °.

FEATURES

The simplified retrofit installation can be used in both new and existing spaces.

SPECIFICATION

Optics: Low luminance: Spot optic, with pptibeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.

APPLICATIONS

Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.



1x5 LAMP
L: 9 13/16"xW: 9 13/16"xH: 1 3/4"
Cut-Out: 2 1/4" x 6 1/16"

2x5 LAMP
L: 9 13/16"xW: 9 13/16"xH: 3 7/8"
Cut-Out: 5 7/16" x 5 1/2"

1x10 LAMP
L: 9 13/16"xW: 15 5/16"xH: 1 9/16"
Cut-Out: 2 1/4" x 11 5/16"

2x10 LAMP
L: 15 5/16"xW: 9 13/16"xH: 3 7/8"
Cut-Ou: 5 7/16" x 11 5/8"

1x15 LAMP
L: 20 5/8"xW: 9 13/16"xH: 1 9/16"
Cut-Out: 2 1/4" x 16 1/2"

2x15 LAMP
L: 20 9/16"xW: 9 13/16"xH: 3 7/8"
Cut-Out: 5 7/16" x 16 1/2"

ORDERING GUIDE / YOUR PRODUCT CODE



SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
<input type="radio"/> G4011A-05-A-NC/720lm	<input type="radio"/> 120V	<input type="radio"/> 3000K	<input type="radio"/> 80+	<input type="radio"/> Non-dimming	<input type="radio"/> Trimmed	<input type="radio"/> White	<input type="radio"/> White
<input type="radio"/> G4011A-2x05-A-NC/1450lm	<input type="radio"/> 230V	<input type="radio"/> 4000K	<input type="radio"/> 90+	<input type="radio"/> TRIAC Dimming	<input type="radio"/> Trimless	<input type="radio"/> Black	<input type="radio"/> Black
<input type="radio"/> G4012A-10-A-NC/1450lm	<input type="radio"/> 277V	<input type="radio"/> 5000K		<input type="radio"/> 0~10V Dimming		<input type="radio"/> Silver	<input type="radio"/> Chrome
<input type="radio"/> G4012A-2x10-A-NC/2900lm	<input type="radio"/> 120-277V						<input type="radio"/> Gold
<input type="radio"/> G4013A-15-A-NC/1450lm							
<input type="radio"/> G4013A-2x15-A-NC/4400lm							

* Other special requirements please confirm with our factory


LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



REMODEL WALL WASH MINI LED MULTIPLE DOWNLIGHT


LIGHT SOURCE SMD CHIPS G401XA-X-W Series

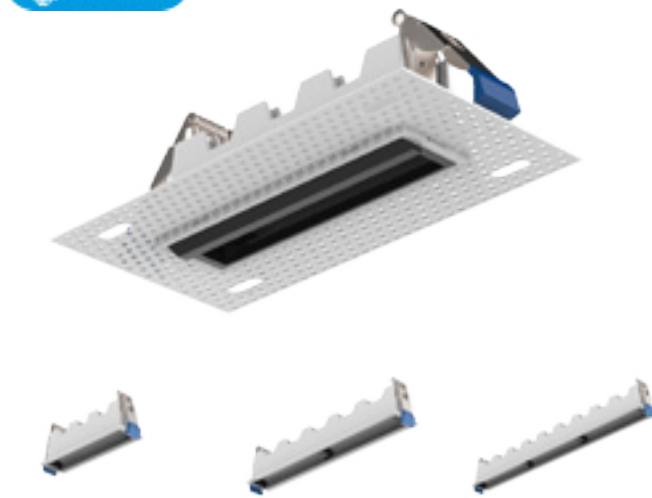

- G4011A-05-W
- G4012A-10-W
- G4013A-15-W



DIMENSIONS

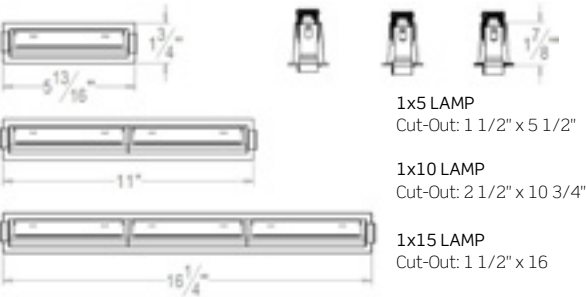

DESCRIPTION

The Mini Multiple Downlight Series is equipped with 5, 10 and 15 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visual comfort. It can illuminate the whole wall without any shadow. Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Asymmetrical optic system designed to achieve an effective wall washer distribution.

FEATURES

Revolutionary narrow recessed downlight available in slim trim or trimless. The simplified retrofit installation can be used in both new and existing spaces. Life Rated for 50,000 hours at 70% lumen maintenance. Easy installation for new construction and remodel applications.

SPECIFICATION

Optics: Low luminance: Spot optic, with pptibeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.


APPLICATIONS

Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.

TRIM OPTION



Trimmed



Trimless

ORDERING GUIDE / YOUR PRODUCT CODE



SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
<input type="radio"/> G4011A-05-W/650lm	<input type="radio"/> 120V	<input type="radio"/> 3000K	<input type="radio"/> 80+	<input type="radio"/> Non-dimming	<input type="radio"/> Trimmed	<input type="radio"/> White	<input type="radio"/> White
<input type="radio"/> G4012A-10-W/1300lm	<input type="radio"/> 230V	<input type="radio"/> 4000K	<input type="radio"/> 90+	<input type="radio"/> TRIAC Dimming	<input type="radio"/> Trimless	<input type="radio"/> Black	<input type="radio"/> Black
<input type="radio"/> G4013A-15-W/1950lm	<input type="radio"/> 277V	<input type="radio"/> 5000K		<input type="radio"/> 0~10V Dimming		<input type="radio"/> Silver	<input type="radio"/> Chrome
	<input type="radio"/> 120-277V						<input type="radio"/> Gold

* Other special requirements please confirm with our factory

LISTING / WARRANTY


ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



Liteharbor Harbor of Light!

NEW CONSTRUCTION IC AIRTIGHT WALL WASH MINI LED MULTIPLE


LIGHT SOURCE SMD CHIPS G401XA-X-W-IA Series

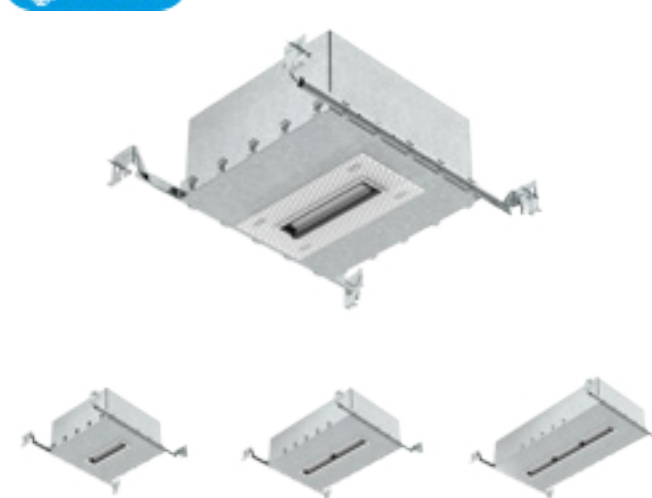

- G4011A-05-W-IA
- G4012A-10-W-IA
- G4013A-15-W-IA



DIMENSIONS

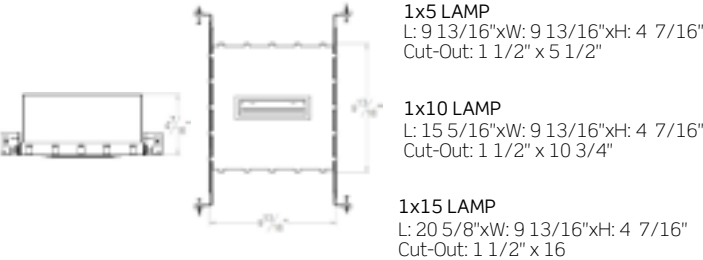

DESCRIPTION

The Mini Multiple Downlight Series is equipped with 5, 10 and 15 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visual comfort. It can illuminate the whole wall without any shadow. Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Asymmetrical optic system designed to achieve an effective wall washer distribution.

FEATURES

Revolutionary narrow recessed downlight available in slim trim or trimless. The simplified retrofit installation can be used in both new and existing spaces. Life Rated for 50,000 hours at 70% lumen maintenance. Easy installation for new construction and remodel applications.

SPECIFICATION

Optics: Low luminance: Spot optic, with pptibeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.


APPLICATIONS

Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.

TRIM OPTION



Trimmed



Trimless

ORDERING GUIDE / YOUR PRODUCT CODE



SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
<input type="radio"/> G4011A-05-W-IA/650lm	<input type="radio"/> 120V	<input type="radio"/> 3000K	<input type="radio"/> 80+	<input type="radio"/> Non-dimming	<input type="radio"/> Trimmed	<input type="radio"/> White	<input type="radio"/> White
<input type="radio"/> G4012A-10-W-IA/1300lm	<input type="radio"/> 230V	<input type="radio"/> 4000K	<input type="radio"/> 90+	<input type="radio"/> TRIAC Dimming	<input type="radio"/> Trimless	<input type="radio"/> Black	<input type="radio"/> Black
<input type="radio"/> G4013A-15-W-IA/1950lm	<input type="radio"/> 277V	<input type="radio"/> 5000K		<input type="radio"/> 0~10V Dimming		<input type="radio"/> Silver	<input type="radio"/> Chrome
	<input type="radio"/> 120-277V						<input type="radio"/> Gold

* Other special requirements please confirm with our factory

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



E-mail:info@liteharbor.com

NEW CONSTRUCTION WALL WASH MINI LED MULTIPLE DOWNLIGHT



G401XA-X-W-NC Series



G4011A-05-W-NC




G4012A-10-W-NC



G4013A-15-W-NC



DIMENSIONS



1x5 LAMP
L: 9 13/16"xW: 9 13/16"
Cut-Out: 1 1/2" x 5 1/2"

1x10 LAMP
L: 15 1/4"xW: 9 13/16"
Cut-Out: 1 1/2" x 10 3/4"

1x15 LAMP
L: 20 5/8"xW: 9 13/16"
Cut-Out: 1 1/2" x 16"

DESCRIPTION

The Mini Multiple Downlight Series is equipped with 5, 10 and 15 lamps. The miniaturized design, die-cast aluminum body, and high-performance acrylic diffuser provide uniform scientific light output for maximum visual comfort. It can illuminate the whole wall without any shadow. Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Asymmetrical optic system designed to achieve an effective wall washer distribution.

FEATURES

Revolutionary narrow recessed downlight available in slim trim or trimless. The simplified retrofit installation can be used in both new and existing spaces. Life Rated for 50,000 hours at 70% lumen maintenance. Easy installation for new construction and remodel applications.

SPECIFICATION

Optics: Low luminance: Spot optic, with pptbeam technology
Material: Body and Heat sink: Die-cast aluminum, Reflector and Baffle: Thermoplastic
Mounting: New construction installation or remodel installation
Electrical: High efficiency electronic driver, rated at 50 000 hours
Weight: 0.1 to 2.42lbs (0.05 to 1.1kg)
Warranty: 3 year limited warranty.

APPLICATIONS

Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.

TRIM OPTION



Trimmed



Trimless

ORDERING GUIDE / YOUR PRODUCT CODE



SERIES/LUMEN	INPUT VOLTAGE	CCT	CRI	DIMMING	TRIM	FINISH	REFLECTOR
○ G4011A-05-W-NC/650lm	○ 120V	○ 3000K	○ 80+	○ Non-dimming	○ Trimmed	○ White	○ White
○ G4012A-10-W-NC/1300lm	○ 230V	○ 4000K	○ 90+	○ TRIAC Dimming	○ Trimless	○ Black	○ Black
○ G4013A-15-W-NC/1950lm	○ 277V	○ 5000K		○ 0~10V Dimming		○ Silver	○ Chrome
	○ 120-277V						○ Gold

* Other special requirements please confirm with our factory

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.

