


# AL35-VA-FM-BK LED PENDANT DOWNLIGHT

<b>Catalog #</b>		<b>Prepared by</b>	LiteHarbor
<b>Project</b>		<b>Date</b>	
<b>Notes</b>			

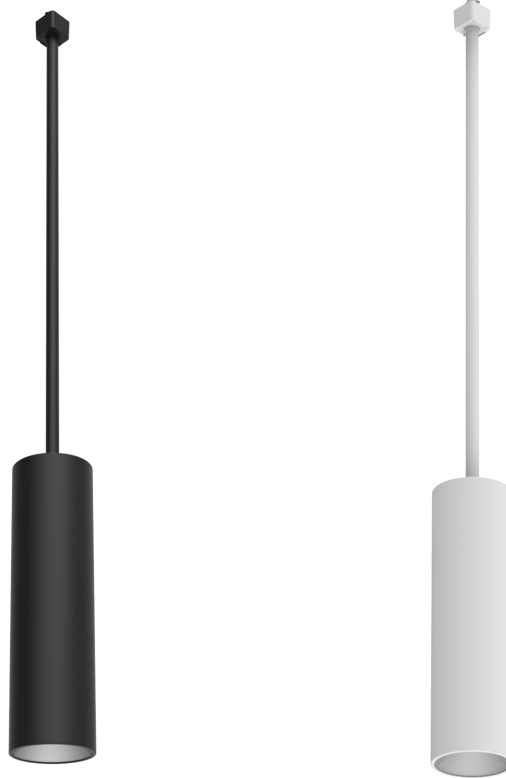

LED PENDANT DOWNLIGHT

## 3.5 Inch Cylinders LED Pendant Downlight

### Features

- Sleek, high performance pendant complements pendant downlighting family.
- Unique flush, surface mount design allows for precise alignment and adjustment.
- All aluminum construction, powder coat painted in white, black or silver finish for harsh, weatherproof applications.
- 120V AC Direct technology in 10W, 16W or 20W dimmable modules with integrated circuit.
- Easy installation and ultra energy efficient.
- Dedicated 9° optic with field changeable 12°, 24°, 36° & 50° optics.

### Specifications

Material: Die cast aluminum

Input Voltage: 120/277v 50/60Hz input

Wattage: 10/16/20W



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)

Website: [www.liteharbor.com](http://www.liteharbor.com)

Specifications subject to change w/o notice

Revision: Jul. 2019

CCT: 90 CRI & 80 CRI in 2700K, 3000K, 3500K and 4100K

PF: >0.98

Shape: Cylinders

### Mounting


Pendant mounted.

### Listing / Warranty

ETL listed to US and Canadian standards for damp location W/Feed through.

5 Year Limited Warranty.

### Dimensions

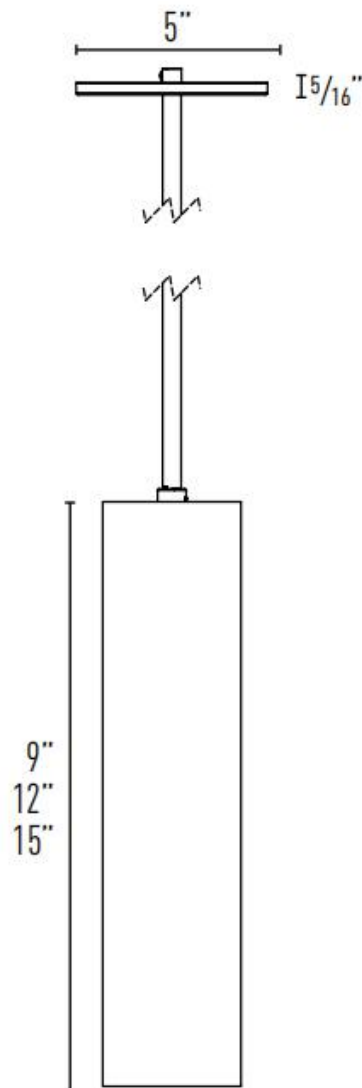

LED PENDANT DOWNLIGHT



**Liteharbor Lighting Technology Co., Ltd.**  
New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687  
FAX: +86-757-8180 8685  
E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)

Website: [www.liteharbor.com](http://www.liteharbor.com)  
Specifications subject to change w/o notice  
Revision: Jul. 2019

## Odering Guide

Series	Input Voltage	Wattage	Finish	Height
<input type="checkbox"/> AL35-VA-FM 3.5" Cylinder LED Pendant Downlight	<input type="checkbox"/> 120V <input type="checkbox"/> 277V <input type="checkbox"/> 120~277V	<input type="checkbox"/> 10W <input type="checkbox"/> 16W <input type="checkbox"/> 20W	<input type="checkbox"/> White <input type="checkbox"/> Black	<input type="checkbox"/> 9" <input type="checkbox"/> 12" <input type="checkbox"/> 15"

CCT/CRI	Optic
<input type="checkbox"/> 2700K/80+	<input type="checkbox"/> 9° Narrow Spot
<input type="checkbox"/> 2700K/90+	<input type="checkbox"/> 12° Spot
<input type="checkbox"/> 3000K/80+	<input type="checkbox"/> 24° Narrow Flood
<input type="checkbox"/> 3000K/90+	<input type="checkbox"/> 36° Flood
<input type="checkbox"/> 3500K/80+	<input type="checkbox"/> 50° Wide Flood
<input type="checkbox"/> 3500K/90+	
<input type="checkbox"/> 4100K/80+	
<input type="checkbox"/> 4100K/90+	

\*Other Special Requirements Please Contact with us.



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)

Website: [www.liteharbor.com](http://www.liteharbor.com)

Specifications subject to change w/o notice

Revision: Jul. 2019