

AL35-VA-SFM LED PENDANT DOWNLIGHT

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



LED PENDANT DOWNLIGHT

3.5 Inch Square Shape LED Pendant Downlight

Features

- Sleek, high performance pendant complements pendant downlighting family.
- Unique flush, surface mount design allows for precise alignment and adjustment.
- All aluminum construction, powder coat painted in white, black or silver finish for harsh, weatherproof applications.
- 120V AC Direct technology in 10W, 16W or 20W dimmable modules with integrated circuit.
- Easy installation and ultra energy efficient.
- Dedicated 9° optic with field changeable 12°, 24°, 36° & 50° optics.

Specifications

Material: Die cast aluminum

Input Voltage: 120~277v 50/60Hz input

Wattage: 10/16/20W



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jul. 2019

CCT: 90 CRI & 80 CRI in 2700K, 3000K, 3500K and 4100K

PF: >0.98

Shape: Cylinders

Mounting


Pendant mounted.

Listing / Warranty

ETL listed to US and Canadian standards for damp location W/Feed through.

5 Year Limited Warranty.

Dimensions

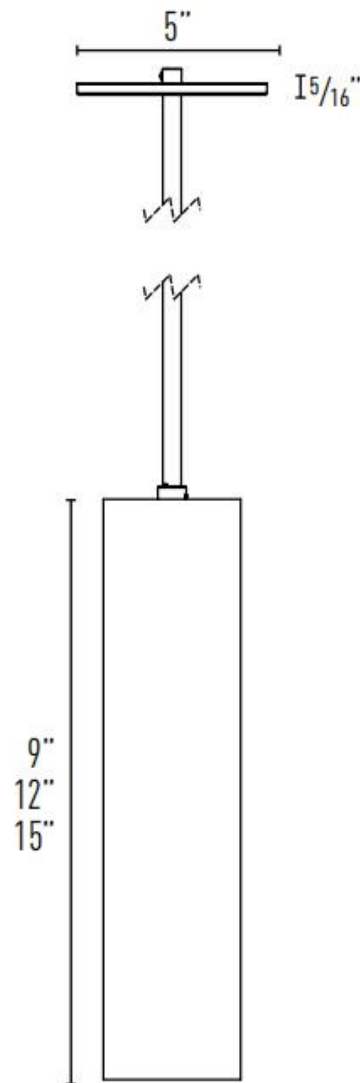

LED PENDANT DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jul. 2019

Odering Guide

Series	Input Voltage	Wattage	Finish	Height
<input type="checkbox"/> AL35-VA-SFM	<input type="checkbox"/> 120V	<input type="checkbox"/> 10W	<input type="checkbox"/> White	<input type="checkbox"/> 9"
3.5" Square LED	<input type="checkbox"/> 277V	<input type="checkbox"/> 16W	<input type="checkbox"/> Black	<input type="checkbox"/> 12"
Pendant Downlight	<input type="checkbox"/> 120~277V	<input type="checkbox"/> 20W		<input type="checkbox"/> 15"

CCT/CRI	Optic
<input type="checkbox"/> 2700K/80+	<input type="checkbox"/> 9° Narrow Spot
<input type="checkbox"/> 2700K/90+	<input type="checkbox"/> 12° Spot
<input type="checkbox"/> 3000K/80+	<input type="checkbox"/> 24° Narrow Flood
<input type="checkbox"/> 3000K/90+	<input type="checkbox"/> 36° Flood
<input type="checkbox"/> 3500K/80+	<input type="checkbox"/> 50° Wide Flood
<input type="checkbox"/> 3500K/90+	
<input type="checkbox"/> 4100K/80+	
<input type="checkbox"/> 4100K/90+	

*Other Special Requirements Please Contact with us.



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jul. 2019