



DG6001



Spike Light Series




DESCRIPTION

- The smooth linearity combines with the LED structure characteristic, simple appearance.
- Light source and electrical part is separate design, easy for installation and maintenance.
- 180° rotational structure, meets the needs of different applications.
- Brass materials, vintage surface finishing.
- Three parts fission structure, adapt to different power.
- Reasonable heat dissipation design, ensure the service life.
- Professional optical design with efficient optical lens distribution,
- high efficiency, can provide variety of light distribution options.
- Lighting structure, electrical appliance safety compliance with EN60598 GB7000 standard requirements.
- Electric shock protection: Class I
- IP rating: IP65

LIGHT DISTRIBUTION CURVE:

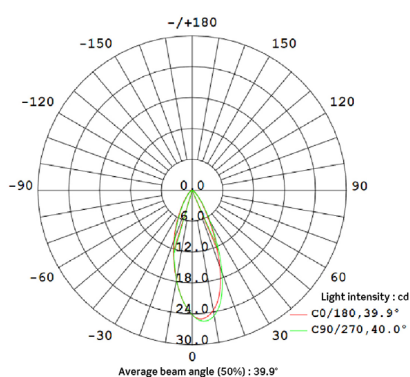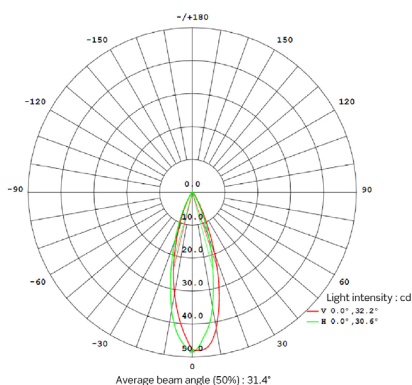


DIMENSION:

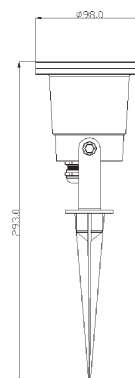

OTHER SPECIAL REQUIREMENTS PLEASE CONFIRM WITH FACTORY



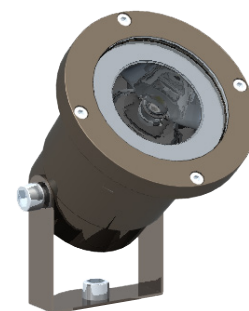

APPLICATION:

Lawns, park, villa landscape, street trees, square, community, buildings and where need outdoor lights decoration.

ORDERING GUIDE

Model	Input Voltage	Light Source	Power	Luminous Efficiency	Optional light	LED Luminous Flux	IP Rating
DG6001	AC100-277V	1PCS(5050)	6W	>110lm/W	30/40	6600lm	IP65
DG6001A	AC100-277V	1PCS(5050)	3W	>120lm/W	30/40	6000lm	IP65
DG6001B	AC100-277V	1PCS(5050)	10W	>120lm/W	30/40	4800lm	IP65
DG6001C	AC100-277V	1PCS(COB)	15W	>110lm/W	30/40	3300lm	IP65
DG6001D	AC100-277V	6PCS-RGB	3W	-	30/40	-	IP65
DG6001E	AC100-277V	12PCS-RGB	6W	-	30/40	-	IP65

OTHER PARAMETERS

Ambient temperature	-30 --50°C
Working Temperature	RH10%-90%
CCT	Warm White 2850K-3200K Neutral White 3700K-4200K Pure White 4700K-5300K RGB
CRI	Ra>75-95
IP Rating	IP65
Lifetime	>50000h
Installation	Pendant mounting
Electric-shock safeguard	CIASS I



Website



Facebook



Google+



Twitter

📍 New Industry Area, Hecun, Danzao Town, Nanhai, Foshan City, China

☎ 0757-8180-8675

🌐 www.liteharbor.com

✉ info@liteharbor.com