

SPECIFICATION SHEET

# Ardito LED - A3SSF

(DL3SSF)

3-1/2" Series

Project \_\_\_\_\_

Notes \_\_\_\_\_

Fixture Type \_\_\_\_\_

Date \_\_\_\_\_

## Ultra-Thin Profile Square Regressed Shower Trim



WITH FLANGE

A3SSF-2222 - XXX (illustrated)



FLANGELESS TRIM

A3SSF-TR22 - XXX (illustrated)

Aluminum square, 3-1/2" high efficiency regressed shower dimmable LED downlight trim. May be installed with a low profile ultra-thin flange or flangeless trim in configuration for insulated, non-insulated and remodel (non-IC) ceilings.





### SPECIFICATIONS



TRIM DETAILS	<p>Requires a 6-1/2" (165 mm) clearance beyond the ceiling level.</p> <p>Perfect fit into ceiling</p> <p>Each part of the housing should be at LEAST 3" (76 mm) from insulation (non-IC configurations)</p> <p>Can fit in ceilings up to 1-1/2" (38 mm) thick</p> <p>Junction box is accessible from below the ceiling for ease of maintenance</p>
HEAT SINK	<p>High quality injection molded aluminum heat sink ensuring maximum heat dissipation for optimal performance.</p>
CEILING CUTOUT	<p><b>3-3/4" (95 mm) x 3-3/4" (95 mm)</b></p> <p><b>Included:</b> Cardboard cutout template</p> <p><b>Optional:</b> Reusable steel cutout template for square trim <b>(TEMP-SQ)</b></p>
CERTIFICATION	<ul style="list-style-type: none"> <li>cULus <b>E343977</b> for wet locations</li> <li>Certified under California Energy Commission according to reference joint Appendix 8 (JA8-2016)</li> <li>Certified Air Tight ASTM E283</li> </ul>
WARRANTY	<p>1 year on components against manufacturing defects</p> <p>5 years on LED arrays and drivers</p>

WITH FLANGE

FLANGELESS TRIM



## SPECIFICATION SHEET

# Ardito LED - A3SSF

## (DL3SSF)

3-1/2" Series

## Ultra-Thin Profile Square Regressed Shower Trim



## SPECIFICATIONS (CONT'D)

## COMPATIBLE HOUSINGS

	Remodel Housing	New Construction Housing	Insulated Housing	Insulated Air Tight Housing (Title 24)		Ceiling thickness suggested for insulated housing as a using standard.
<b>Performance 1 (14W)</b>	REA3V1	NWA3SV1	*ISA3SV1	*ICAT6S3-ARV1		* Ceiling thickness must be at least 1/4" (6.4 mm) for insulated housing as a using standard.
<b>Performance 2 (23W)</b>	REA3V2	NWA3SV2	*ISA3SV2	*ICAT6S3-ARV2		

For dimming, please visit our Web site frequently to find suggested compatible dimmer list: [www.contrastlighting.com](http://www.contrastlighting.com)

## LIGHT ENGINE

**STANDARD (SOLID WHITE)**

Lumileds Luxeon CoB 1205 GEN3.

L<sub>70</sub> @ 50,000 hours of operation.

3-Step MacAdam ellipse (3 SDCM)

Color Temperatures: 2,700K - 3,000K - 3,500K - 4,000K

CRI: 90+ (93 typical)

R9: &gt;50

Delivered Lumens: Performance 1 (14W) - 1,257 lumens @ 3,000K, 89.8 lm/W  
 Performance 2 (23W) - 1,878 lumens @ 3,000K, 81.7 lm/W } **Clear lens**

Performance 1 (14W) - 945 lumens @ 3,000K, 67.5 lm/W  
 Performance 2 (23W) - 1,392 lumens @ 3,000K, 60.5 lm/W } **Frosted lens**

Power Supply: 120V / 277V (universal input)

One driver available in 2 performances (14W and 23W) and offering 2 dimming options within the same unit:

ELV: 120V only

0-10V: 120V / 277V

Consult housing specification sheet for more details.

## OPTIC SYSTEM

Interchangeable optional optical lenses available to customize your lighting.

**Choice of available lenses:****Clear (C)** **Frosted (F)**

Flood (L) — with clear and frosted lens	40°
---	-----

\* Consult .ies files on our Website for more details.



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town Nanhai  
 Foshan City Guangdong China

Tel.: +86-757-81808688  
 Fax.: +86-757-81808685  
 info@liteharbor.com  
 liteharbor.com  
 liteharborfactory.com

© 2021 Liteharbor Lighting Technology Co., Ltd.

All rights reserved

Liteharbor Lighting Technology Co., Ltd. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

## SPECIFICATION SHEET

# Ardito LED - A3SSF

## (DL3SSF)

3-1/2" Series


## Ultra-Thin Profile Square Regressed Shower Trim



## SPECIFICATIONS (CONT'D)

FLANGE FINISHES	Powder coat painted or plated die formed steel.
<i>Options in red may generate a longer production lead time</i>	<b>Different finishes available:</b> 24K Gold Plated <b>(-03)</b> , Chrome <b>(-04)</b> , Brushed Chrome <b>(-04BR)</b> , Matte White <b>(-11)</b> , Brushed Nickel <b>(-12BR)</b> , Satin Nickel <b>(-13)</b> , Matte Black <b>(-22)</b> and Polar Grey <b>(-25)</b>
REFLECTOR FINISHES	<b>Painted</b> Matte White <b>(11)</b> Matte Black <b>(22)</b> Natural Anodized Aluminum <b>(AN)</b> Black <b>(BK)</b>
<i>Options in red may generate a longer production lead time</i>	
FLANGELESS TRIMS (OPTION)	Perforated aluminum plate for flangeless product, allowing you to plaster up to the edge of the opening of the Ardito luminaire. Mud-in-plate sold separately. <b>Ordering code: MIPA3S</b> Consult housing specification sheet for more details.

## TRIM WITH FLANGE CODIFICATION EXAMPLE

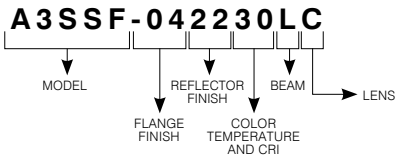*Options in red may generate a longer production lead time.*TRIM WITH FLANGE ORDERING CODES **A3SSF**

MODEL	FLANGE FINISHES	REFLECTOR FINISHES	COLOR TEMPERATURE AND CRI	BEAM	LENSES
<b>A3SSF (DL3SSF)</b>	<b>-04BR</b>	Brushed Chrome	<b>PAINTED</b>	<b>L</b> Flood beam for clear and frosted lens(40°)	<b>C</b> Clear <b>F</b> Frosted
	<b>-11</b>	Matte White	<b>11</b> Matte White		
	<b>-12BR</b>	Brushed Nickel	<b>22</b> Matte Black		
	<b>-22</b>	Matte Black	<b>AN</b> Natural Anodized Aluminum		
	<b>-25</b>	Polar Grey	<b>BK</b> Black		
	<b>-03</b>	24K Gold Plated			
	<b>-04</b>	Chrome			
	<b>-13</b>	Satin Nickel			
	<b>27</b>	2,700K (90+ CRI)			
	<b>30</b>	3,000K (90+ CRI)			
<b>35</b>	3,500K (90+ CRI)				
<b>40</b>	4,000K (90+ CRI)				



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town Nanhai  
Foshan City Guangdong ChinaTel.: +86-757-81808688  
Fax.: +86-757-81808685  
info@liteharbor.com  
liteharbor.com  
liteharborfactory.com© 2021 Liteharbor Lighting Technology Co., Ltd.  
All rights reserved

Liteharbor Lighting Technology Co., Ltd. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SPECIFICATION SHEET


# Ardito LED - A3SSF

(DL3SSF)

3-1/2" Series

## Ultra-Thin Profile Square Regressed Shower Trim

FLANGELESS TRIM OPTION — CODIFICATION EXAMPLE

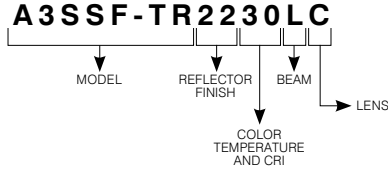

Mud-in-plate required for use of flangeless trim (see ordering code below)


*Options in red may generate a longer production lead time.*

FLANGELESS TRIM OPTION — ORDERING CODES **A3SSF-TR**


MODEL	REFLECTOR FINISHES	COLOR TEMPERATURE AND CRI	BEAM	LENSES
<b>A3SSF-TR</b> <b>(DL3SSF-TR)</b>	<b>PAINTED</b>	<b>27</b> 2,700K (90+ CRI)	<b>L</b> Flood beam for clear and frosted lens(40°)	<b>C</b> Clear <b>JA8</b> <small>DIFFUSED</small>
	<b>11</b> Matte White	<b>30</b> 3,000K (90+ CRI)		<b>F</b> Frosted
	<b>22</b> Matte Black	<b>35</b> 3,500K (90+ CRI)		
	<b>AN</b> Natural Anodized Aluminum	<b>40</b> 4,000K (90+ CRI)		
	<b>BK</b> Black			

### MUD-IN-PLATE

Required with the use of flangeless trims.  
Consult housing specification sheet for more details.



Code: MIPA3S

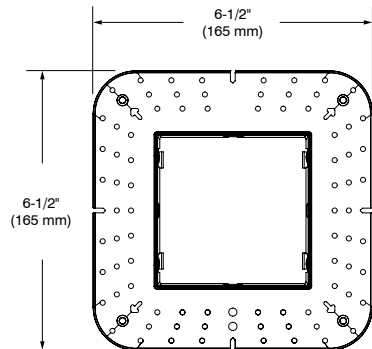

### ORDERING CODES

#### for replacement lenses

For future on-site modifications of the light distribution.


#### Lenses (to modify light diffusion)

Clear (C): **104036**  
Frosted (F): **317240**

### REUSABLE TEMPLATE OPTION

Reusable steel cutout template for square trim.

Code: **TEMP-SQ**



**Liteharbor Lighting Technology Co., Ltd.**  
New Industry Area Hecun Danzao Town Nanhai  
Foshan City Guangdong China

Tel.: +86-757-81808688  
Fax.: +86-757-81808685  
info@liteharbor.com  
liteharbor.com  
liteharborfactory.com

© 2021 Liteharbor Lighting Technology Co., Ltd.  
All rights reserved  
Liteharbor Lighting Technology Co., Ltd. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

# Ardito LED - A3SSF

## (DL3SSF)

3-1/2" Series

Ultra-Thin Profile Square Regressed Shower Trim

PHOTOMETRIC DATA



In order to obtain the accurate photometric data, multiply the lumens relative to your product selection by the applicable factor(s). Take note these factors also need to be implemented in the .ies files available on our website.

WITH PERFORMANCE 1 HOUSING (14W)

	Flood (40°)	
<b>2,700K with 90+ CRI</b>	1,214 lm	86.7 lm/W
<b>3,000K with 90+ CRI</b>	1,258 lm	89.9 lm/W
<b>3,500K with 90+ CRI</b>	1,319 lm	94.2 lm/W
<b>4,000K with 90+ CRI</b>	1,353 lm	96.6 lm/W

WITH PERFORMANCE 2 HOUSING (23W)

	Flood (40°)	
<b>2,700K with 90+ CRI</b>	1,812 lm	78.8 lm/W
<b>3,000K with 90+ CRI</b>	1,878 lm	81.7 lm/W
<b>3,500K with 90+ CRI</b>	1,969 lm	85.6 lm/W
<b>4,000K with 90+ CRI</b>	2,019 lm	87.8 lm/W

Lens Factors	
<b>C</b>	1
<b>F</b>	0.71



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town Nanhai  
Foshan City Guangdong China

Tel.: +86-757-81808688  
Fax.: +86-757-81808685  
info@liteharbor.com  
liteharbor.com  
liteharborfactory.com

© 2021 Liteharbor Lighting Technology Co., Ltd.  
All rights reserved

Liteharbor Lighting Technology Co., Ltd. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SPECIFICATION SHEET

# Ardito LED - A3SSF

## (DL3SSF)

3-1/2" Series


Ultra-Thin Profile Square Regressed Shower Trim

PHOTOMETRIC DATA



**3,000K, 90+ CRI, Flood, Performance 1 — WITH CLEAR LENS**

**CANDLEPOWER DISTRIBUTION**



**LIGHT CONE**

Distance	FC	DIA
06'	74.8	4.3'
08'	42.1	5.7'
10'	26.9	7.1'
12'	18.7	8.5'
14'	13.7	10.0'
16'	10.5	11.4'

**Beam: 40°**  
Beam Edge defined as 50% of Maximum Nadir Candle-power.

**LUMINAIRE**

<b>Performance 1 LED</b>	3,000K Flood
<b>CBCP / Lumens</b>	2,692 / 1,257.3
<b>Watts</b>	<b>120V 277V</b> 14W 14.5W
<b>Operating AMPS</b>	0.12A 0.052A
<b>Lumen Maintenance</b>	L70 @ 50,000 Hrs
<b>CRI</b>	90+
<b>Lumens/Watt</b>	89.9
<b>Spacing Criteria</b>	0.68

**COEFFICIENT OF UTILIZATION - %**

Ceiling Reflect %	80		50		30		
Wall Reflect %	50	30	50	30	50	30	
<b>RCR</b>	0	119	119	111	111	106	106
	2	106	103	101	99	98	96
	4	96	91	93	89	91	88
	6	87	82	85	81	84	80
	8	80	75	78	74	78	74
	10	74	69	73	69	72	68

**Zonal Cavity Method**  
Effective Floor Cavity Reflectance 20%

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%LUMINAIRE
0-30	1,170.6	93.1%
0-40	1,255.4	99.9%
0-60	1,257.3	100%
60-90	0.0	0%
0-90	1,257.3	100%

**MULTIPLE UNIT DATA - (RCR 2)**

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/ SQ. FT.
5'	62	0.58
6'	35	0.33
7'	24	0.23
8'	24	0.23
9'	16	0.15


38' x 38' x 10' Room. Workplan located 2-1/2' (30").  
Reflectance factor 80%/50%/30%

**CANDELAS DISTRIBUTION**

DEGREES/ VERTICAL	CANDELAS	DEGREES/ VERTICAL	CANDELAS
0	2,692	40	11
5	2,715	50	0
10	2,508	60	0
15	1,952	70	0
20	1,329	80	0
25	847	90	0
30	391		

**3,000K, 90+ CRI, Flood, Performance 2 — WITH CLEAR LENS**

**CANDLEPOWER DISTRIBUTION**



**LIGHT CONE**

Distance	FC	DIA
06'	111.5	4.2'
08'	62.7	5.7'
10'	40.1	7.1'
12'	27.9	8.5'
14'	20.5	9.9'
16'	15.7	11.3'

**Beam: 40°**  
Beam Edge defined as 50% of Maximum Nadir Candle-power.

**LUMINAIRE**

<b>Performance 2 LED</b>	3,000K Flood
<b>CBCP / Lumens</b>	4,012 / 1,878.2
<b>Watts</b>	<b>120V 277V</b> 23W 23.5W
<b>Operating AMPS</b>	0.19A 0.085A
<b>Lumen Maintenance</b>	L70 @ 50,000 Hrs
<b>CRI</b>	90+
<b>Lumens/Watt</b>	81.7
<b>Spacing Criteria</b>	0.98

**COEFFICIENT OF UTILIZATION - %**

Ceiling Reflect %	80		50		30		
Wall Reflect %	50	30	50	30	50	30	
<b>RCR</b>	0	119	119	111	111	106	106
	2	106	103	101	99	98	96
	4	96	91	93	89	91	88
	6	87	82	85	81	84	80
	8	80	75	78	74	78	74
	10	74	69	73	69	72	68

**Zonal Cavity Method**  
Effective Floor Cavity Reflectance 20%

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%LUMINAIRE
0-30	1,747.1	93%
0-40	1,875.4	99.8%
0-60	1,878.2	100%
60-90	0.0	0%
0-90	1,878.2	100%

**MULTIPLE UNIT DATA - (RCR 2)**

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/ SQ. FT.
5'	93	1.01
6'	52	0.57
7'	36	0.39
8'	36	0.39
9'	23	0.25

38' x 38' x 10' Room. Workplan located 2-1/2' (30").  
Reflectance factor 80%/50%/30%

**CANDELAS DISTRIBUTION**

DEGREES/ VERTICAL	CANDELAS	DEGREES/ VERTICAL	CANDELAS
0	4,012	40	19
5	4,053	50	0
10	3,761	60	0
15	2,915	70	0
20	1,974	80	0
25	1,268	90	0
30	582		



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town Nanhai  
Foshan City Guangdong China

Tel.: +86-757-81808688  
Fax.: +86-757-81808685  
info@liteharbor.com  
liteharbor.com  
liteharborfactory.com

© 2021 Liteharbor Lighting Technology Co., Ltd.  
All rights reserved

Liteharbor Lighting Technology Co., Ltd. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SPECIFICATION SHEET

# Ardito LED - A3SSF

## (DL3SSF)

3-1/2" Series


Ultra-Thin Profile Square Regressed Shower Trim

PHOTOMETRIC DATA



**3,000K, 90+ CRI, Flood, Performance 1 — WITH FROSTED LENS**

**CANDLEPOWER DISTRIBUTION**



**LIGHT CONE**

Distance	FC	DIA
06'	41.3	4.4'
08'	23.2	5.9'
10'	14.9	7.3'
12'	10.3	8.8'
14'	7.6	10.3'
16'	5.8	11.8'

**Beam: 40°**  
Beam Edge defined as 50% of Maximum Nadir Candle-power.

**LUMINAIRE**

<b>Performance 1 LED</b>	3,000K Flood	
<b>CBCP / Lumens</b>	1486 / 945,2	
<b>Watts</b>	<b>120V</b>	<b>277V</b>
	14W	14,5W
<b>Operating AMPS</b>	0,12A	0,052A
<b>Lumen Maintenance</b>	L70 @ 50000 Hrs	
<b>CRI</b>	+90	
<b>Lumens/Watt</b>	67,5	
<b>Spacing Criteria</b>	0,68	

**COEFFICIENT OF UTILIZATION - %**

Ceiling Reflect %	80		50		30		
Wall Reflect %	50	30	50	30	50	30	
<b>RCR</b>	0	119	119	111	111	106	106
	2	102	98	97	94	94	92
	4	88	83	85	80	83	79
	6	77	71	75	70	74	69
	8	69	63	67	62	66	61
	10	62	56	61	56	60	55

**Zonal Cavity Method**  
Effective Floor Cavity Reflectance 20%

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%LUMINAIRE
0-30	645.9	68.3%
0-40	783.3	82.9%
0-60	919.3	97.3%
60-90	25.8	0.1%
0-90	945.2	100%

**MULTIPLE UNIT DATA - (RCR 2)**

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/SQ. FT.
5'	45	0.53
6'	25	0.30
7'	18	0.21
8'	18	0.21
9'	11	0.13


38' x 38' x 10' Room. Workplan located 2-1/2' (30").  
Reflectance factor 80%/50%/30%

**CANDELAS DISTRIBUTION**

DEGREES/VERTICAL	CANDELAS	DEGREES/VERTICAL	CANDELAS
0	1486	40	145
5	1427	50	81
10	1257	60	42
15	1014	70	9
20	751	80	0
25	515	90	0
30	333		

**3,000K, 90+ CRI, Flood, Performance 2 — WITH FROSTED LENS**

**CANDLEPOWER DISTRIBUTION**



**LIGHT CONE**

Distance	FC	DIA
06'	60.8	4.4'
08'	34.2	5.9'
10'	21.9	7.3'
12'	15.2	8.8'
14'	11.2	10.3'
16'	8.6	11.7'

**Beam: 40°**  
Beam Edge defined as 50% of Maximum Nadir Candle-power.

**LUMINAIRE**

<b>Performance 1 LED</b>	3,000K Flood	
<b>CBCP / Lumens</b>	2188 / 1392,3	
<b>Watts</b>	<b>120V</b>	<b>277V</b>
	23W	23,5W
<b>Operating AMPS</b>	0,19A	0,085A
<b>Lumen Maintenance</b>	L70 @ 50000 Hrs	
<b>CRI</b>	+90	
<b>Lumens/Watt</b>	60,5	
<b>Spacing Criteria</b>	0,68	

**COEFFICIENT OF UTILIZATION - %**

Ceiling Reflect %	80		50		30		
Wall Reflect %	50	30	50	30	50	30	
<b>RCR</b>	0	119	119	111	111	106	106
	2	102	98	97	94	94	91
	4	88	83	85	80	83	79
	6	77	71	75	70	74	69
	8	69	63	67	62	66	61
	10	62	56	61	56	60	55

**Zonal Cavity Method**  
Effective Floor Cavity Reflectance 20%

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%LUMINAIRE
0-30	950.8	68.3%
0-40	1153.5	82.9%
0-60	1354	97.2%
60-90	38.3	2.8%
0-90	1392.3	100%

**MULTIPLE UNIT DATA - (RCR 2)**

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/SQ. FT.
5'	66	0.53
6'	37	0.30
7'	26	0.21
8'	26	0.21
9'	17	0.13

38' x 38' x 10' Room. Workplan located 2-1/2' (30").  
Reflectance factor 80%/50%/30%

**CANDELAS DISTRIBUTION**

DEGREES/VERTICAL	CANDELAS	DEGREES/VERTICAL	CANDELAS
0	2188	40	214
5	2100	50	119
10	1850	60	61
15	1493	70	13
20	1106	80	0
25	758	90	0
30	491		



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town Nanhai  
Foshan City Guangdong China

Tel.: +86-757-81808688  
Fax.: +86-757-81808685  
info@liteharbor.com  
liteharbor.com  
liteharborfactory.com

© 2021 Liteharbor Lighting Technology Co., Ltd.  
All rights reserved

Liteharbor Lighting Technology Co., Ltd. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.