

BL6-FM7 & BL6-SFM7 7" 3CCT LED Flush Mount

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



BL6-FM7

ORDER MATRIX | Example: BL6-FM7

A B C D E F

A	Series
BL6-FM7	7" Round LED Flush Mount Ceiling Light
BL6-SFM7	7" Square LED Flush Mount Ceiling Light

B	Input Voltage
	120V
277	277V
U	120-277V

C	Dimmable
	Non-Dimmable
DM	Dimmable

D	LED Available
Cree	Cree
Citizen	Citizen
Epistar	Epistar
Seoul	Seoul
Osram	Osram



BL6-SFM7

Description

An architecturally pleasing, easy to install and low profile slim LED instant mount round and square aperture downlighting.

Slim line, light weight and sleek look, provides more uniform light and an instant on.

It is a low profile downlight intended for ceiling or wall mount applications.

This luminaire offers the appearance of a recessed downlight but is actually surface mounted.

3CCT range changeable, 3000K, 4000K and 5000K

Applications

Slim LED Flush Mount Downlight is characterized by a completely flat lens with a narrow flange, giving it an architecturally pleasing look.

This downlighting solution offers an affordable alternative to Air-Seal IC recessed housings or Fire-Rated boxes, reducing material and installation costs.

Emergency

24 hours recharge time

>90 minute operation from battery

over-charge/discharge protection

Other special requirements please confirm with factory.



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015



LED CEILING LIGHT

E	Color Temperature
27K	2700K
40K	4000K
50K	5000K
60K	6000K
3CCT	3000K-4000K-5000K
	Tunable

F	Emergency System
	Without Emergency Battery Backup
EM	With Emergency Battery Backup


Application

Residential
Office
Retail
Hospitality

Dimensions

Round: Ø7"x H:1"

Square: L7" x W7" X H:1"

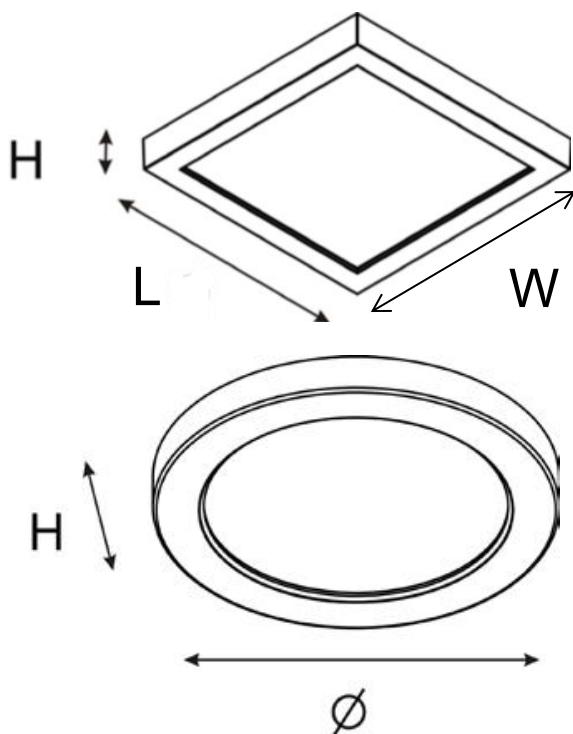

Features

LED 7" flush mount
Decorative flush mount LED fixture
LED 12W Equal to a traditional 60W lamp
80 CRI, 960lm
90 CRI, 720lm
80% energy savings
Damp location listed
Mounts directly to 3" and 4" junction boxes
Easy to install


Finish

Available in White, Brushed Nickel, and Bronze

Listing & Warranty

ETL Certificated
2-Year Limited Warranty

Light Distribution

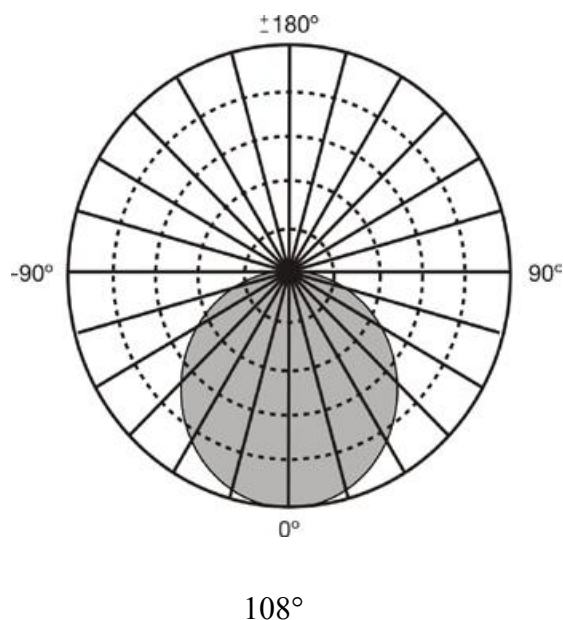

Other special requirements please confirm with factory.



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685


E-mail: info@liteharbor.com

Website: www.liteharbor.com


Specifications subject to change w/o notice

Revision: Jan. 2015



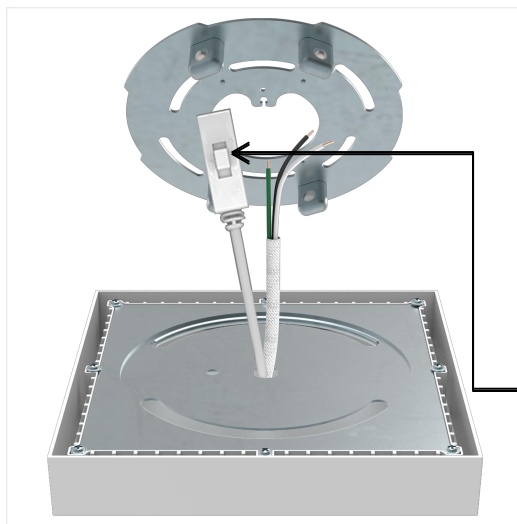

3 SETTING OPTIONS OPTIONS DE RÉGLAGE

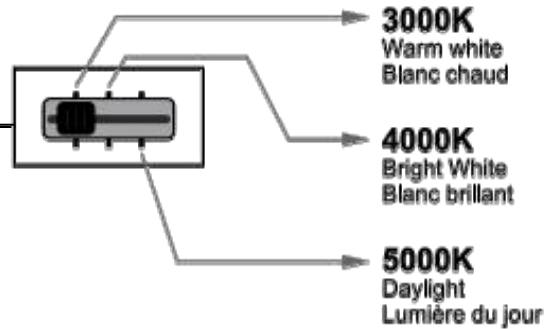


Installation Instruction

Fast and Easy Installation

- Mounts directly to any 3" and 4" junction boxes
- The quick connector makes easy and fast connection, the universal mounting plate ensure a clean and tight fit.




Simply screw the unique design universal mounting plate to the junction box



Make your connections using the quick connect included, and fit into place.



Snap the fixture onto the mounting plate.



Installation finished, Enjoy the sleek ceiling.

Other special requirements please confirm with factory.



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015